


HELIFLEX

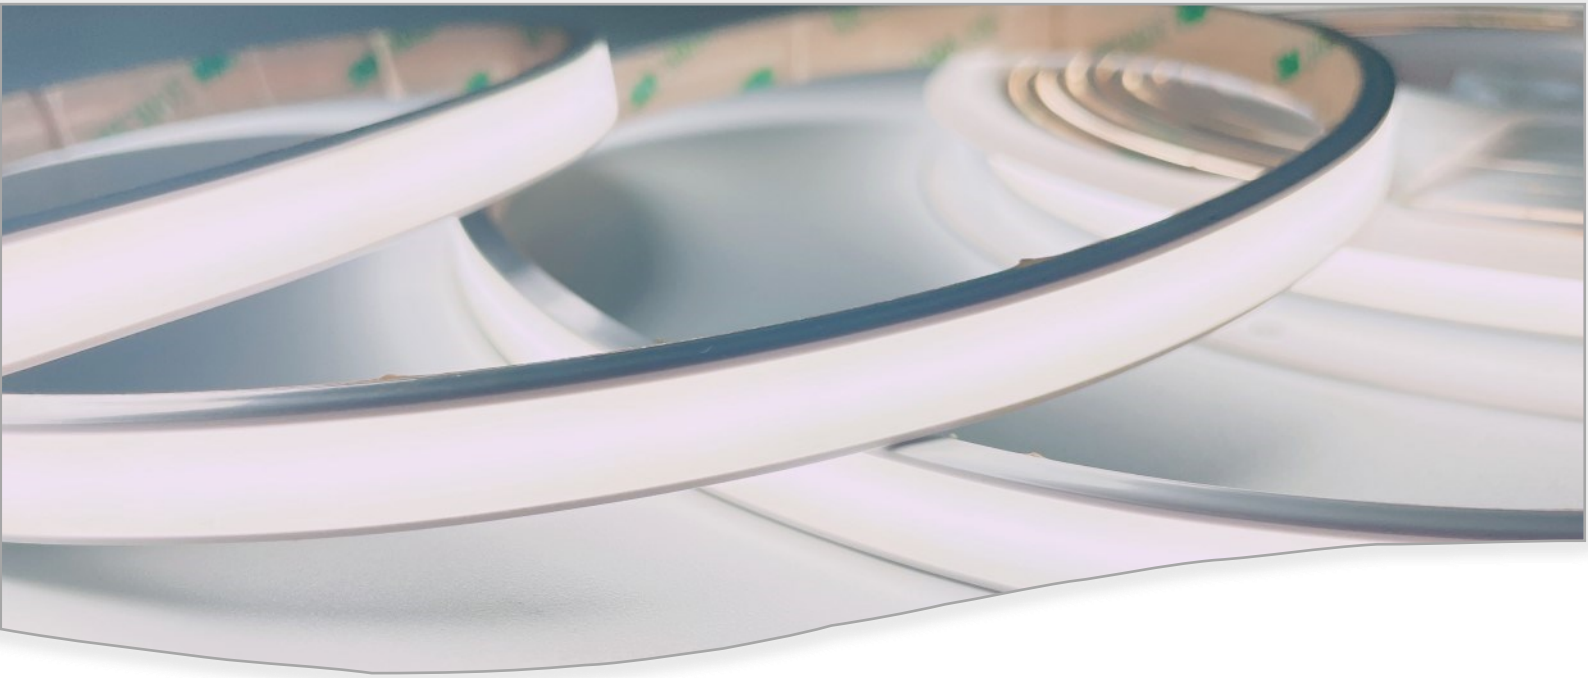


4x12mm | Top Bend | Long Length | COB Dot free

Uniform dot free illumination | Silicon extrusion moulding

High UV and salt water resistance | High impact resistance

Long runs up to 20m powered one end | IP67 | -20 to 45deg C | 480 LED/m



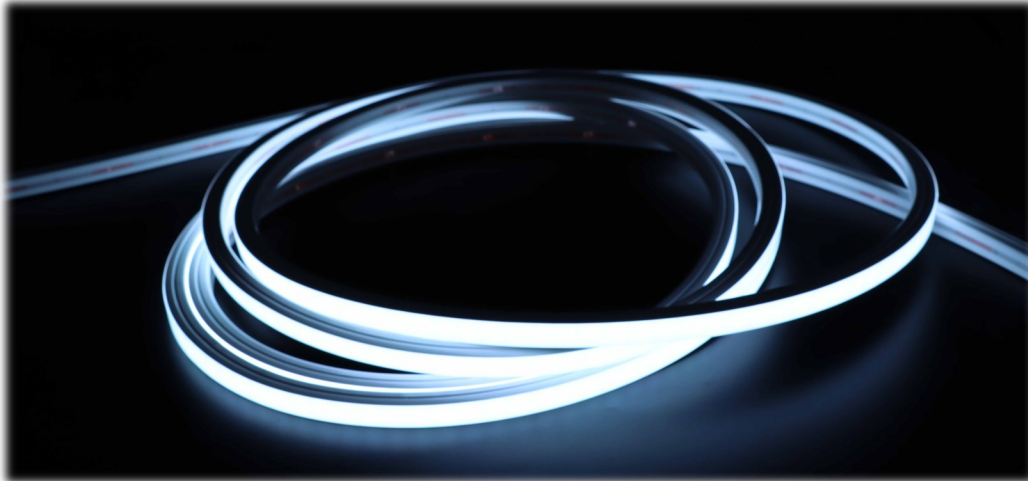

SINGLE COLOUR WHITE

5w per metre (up to 20m powered one end)

CODE	V	W	COLOUR	CUT (mm)	Lm/m	MAX
HFP0412TB.5.27K	24	5	2700k	50	245	20m
HFP0412TB.5.3K	24	5	3000k	50	260	20m
HFP0412TB.5.4K	24	5	4000k	50	295	20m
HFP0412TB.5.6K	24	5	6000k	50	295	20m

10w per metre (up to 10m powered one end)

CODE	V	W	COLOUR	CUT (mm)	Lm/m	MAX
HFP0412TB.10.27K	24	10	2700k	50	490	10m
HFP0412TB.10.3K	24	10	3000k	50	520	10m
HFP0412TB.10.4K	24	10	4000k	50	590	10m
HFP0412TB.10.6K	24	10	6000k	50	590	10m

