


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 53.29 lm/W
MODEL	3200K RA90	I _{max} (cd)	134.9	S/MH(C0/180)	1.21	
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	1.31	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	319.74	η UP,DN(C0-180)	4.1,49.0	
NOMINAL FLUX(lm)	1.33225	CIE CLASS	DIRECT	η UP,DN(C180-360)	3.5,43.4	
LAMPS INSIDE	240	η up (%)	7.5	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	η down (%)	92.5	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

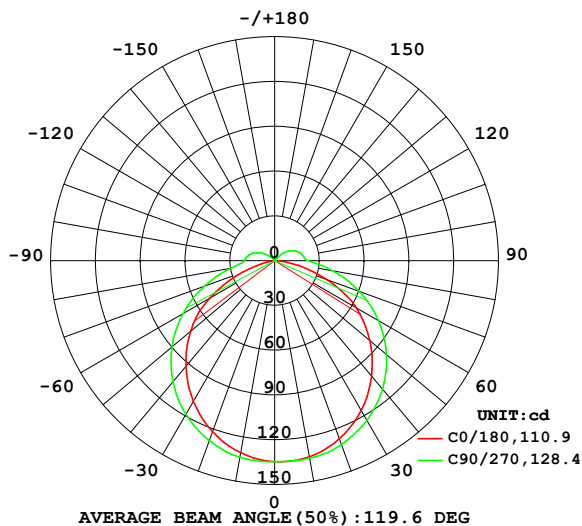

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

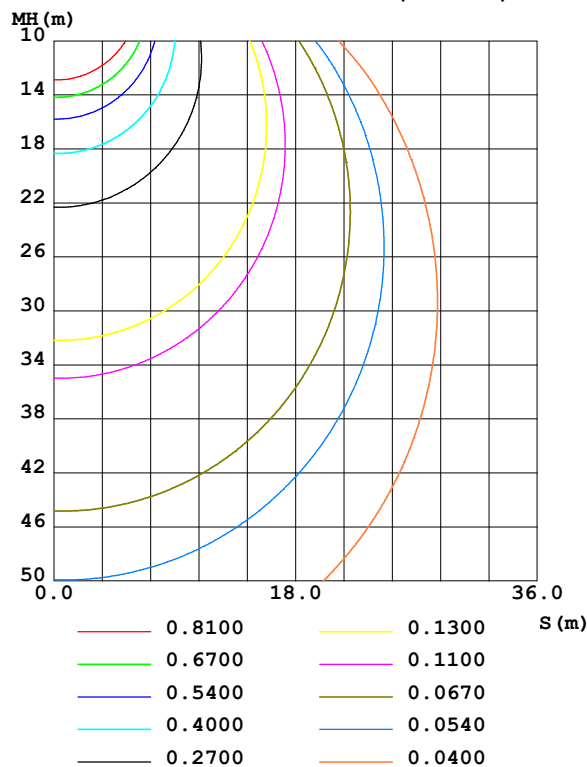

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	133.4	134.0	134.5	134.1	130.7	132.6	133.8	132.5	0- 10	12.79	12.79	2.72,2.72
20	127.0	129.5	131.1	130.0	121.9	126.3	128.2	125.8	10- 20	26.97	29.76	10.6,10.6
30	115.9	120.3	123.5	121.1	108.9	115.4	119.0	114.7	20- 30	32.69	36.5	22.7,22.7
40	101.0	107.6	112.4	108.8	92.50	101.4	106.0	100.4	30- 40	39.53	46.0	37.5,37.5
50	83.15	91.90	97.81	93.40	73.51	84.50	89.76	83.24	40- 50	74.02	100.0	53.2,53.2
60	63.10	73.59	80.28	75.30	50.09	65.10	70.95	63.69	50- 60	69.73	169.7	68.1,68.1
70	37.31	53.20	60.41	54.96	23.29	43.91	50.22	42.53	60- 70	56.92	226.7	80.2,80.2
80	11.78	31.93	39.38	33.51	1.548	23.30	30.00	22.27	70- 80	37.81	264.5	88.2,88.2
90	0.0868	15.42	22.71	16.23	0.0946	13.65	20.46	13.62	80- 90	19.77	284.2	92.5,92.5
100	0.0788	12.74	19.42	12.49	0.1340	11.28	18.39	11.95	90-100	12.97	297.2	95.2,95.2
110	0.1156	10.75	17.13	10.10	0.1708	8.177	15.21	8.501	100-110	10.40	307.6	97.4,97.4
120	0.1681	6.921	13.60	6.332	0.2155	4.161	10.43	4.578	110-120	6.925	314.5	98.9,98.9
130	0.2207	0.5725	8.517	0.3076	0.2628	0.8404	5.325	0.6699	120-130	3.623	318.1	99.7,99.7
140	0.2653	0.2836	0.6984	0.2729	0.3101	0.3414	0.8469	0.3385	130-140	0.9982	319.1	99.9,99.9
150	0.3100	0.3124	0.3199	0.3123	0.3521	0.3519	0.3644	0.3543	140-150	0.2096	319.4	99.9,99.9
160	0.3442	0.3492	0.3487	0.3464	0.3837	0.3834	0.3854	0.3884	150-160	0.1625	319.5	100,100
170	0.3757	0.3755	0.3801	0.3752	0.3994	0.3991	0.4011	0.3989	160-170	0.1072	319.6	100,100
180	0.3968	0.3939	0.3959	0.3963	0.3994	0.3991	0.3985	0.3989	170-180	0.0375	319.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 149.95 lm

%lum = 46.9%

%lamp = 46.9%

Conical surface Flux(120deg): 217.74 lm

%lum = 68.1%


%lamp = 68.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-07

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:6.040m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

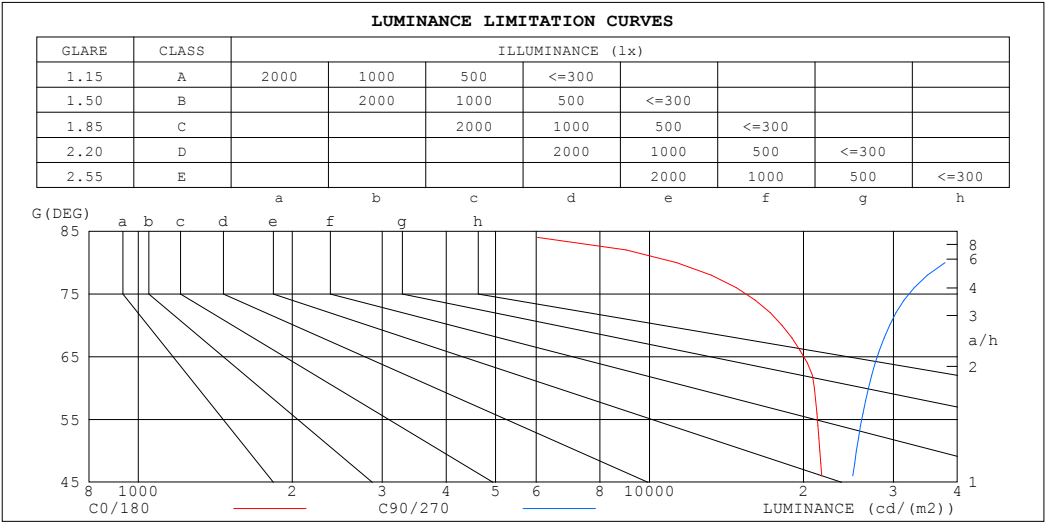

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	7237	60381
80	11296	37842
75	17140	33524
70	18163	29471
65	21105	28659
60	21011	26791
55	21876	26517
50	21538	25390
45	22174	25239


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

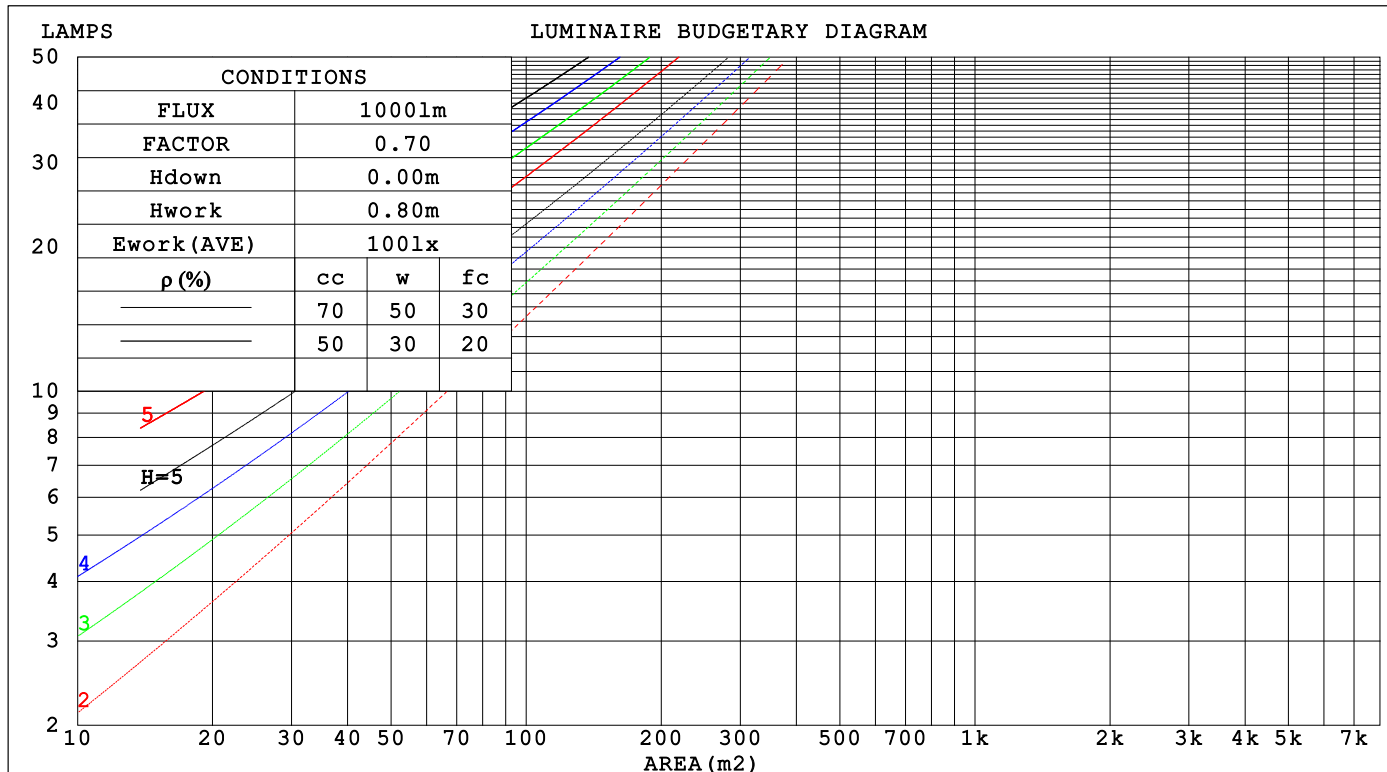

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.342	.195	.062	.333	.190	.060	.315	.181	.058	.299	.172	.055	.284	.164	.053		
2.0	.310	.170	.052	.302	.166	.051	.286	.159	.049	.271	.152	.048	.258	.146	.046		
3.0	.282	.150	.045	.274	.147	.044	.260	.141	.043	.247	.135	.042	.235	.130	.040		
4.0	.257	.134	.039	.251	.131	.039	.238	.126	.038	.226	.121	.037	.215	.117	.036		
5.0	.236	.120	.035	.230	.118	.034	.219	.114	.034	.208	.110	.033	.198	.106	.032		
6.0	.218	.109	.031	.212	.107	.031	.202	.104	.030	.192	.100	.029	.183	.097	.029		
7.0	.202	.100	.028	.197	.098	.028	.188	.095	.027	.179	.092	.027	.171	.089	.026		
8.0	.188	.092	.026	.184	.090	.026	.175	.087	.025	.167	.085	.024	.159	.082	.024		
9.0	.176	.085	.024	.172	.084	.023	.164	.081	.023	.157	.078	.022	.150	.076	.022		
10.0	.165	.079	.022	.161	.078	.022	.154	.075	.021	.147	.073	.021	.141	.071	.020		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.248	.248	.248	.212	.212	.212	.145	.145	.145	.083	.083	.083	.027	.027	.027	
1.0	.240	.214	.190	.206	.183	.163	.141	.126	.113	.081	.073	.066	.026	.024	.021	
2.0	.233	.190	.154	.200	.164	.133	.137	.113	.093	.079	.066	.054	.025	.021	.018	
3.0	.225	.173	.131	.193	.149	.114	.133	.104	.080	.077	.061	.047	.025	.020	.015	
4.0	.218	.160	.116	.187	.138	.101	.129	.096	.071	.074	.056	.042	.024	.018	.014	
5.0	.210	.150	.105	.181	.130	.092	.124	.091	.065	.072	.053	.038	.023	.017	.013	
6.0	.203	.142	.098	.174	.123	.085	.120	.086	.060	.070	.051	.036	.023	.017	.012	
7.0	.196	.135	.092	.169	.117	.080	.117	.082	.057	.068	.048	.034	.022	.016	.011	
8.0	.189	.129	.088	.163	.112	.077	.113	.079	.054	.066	.046	.032	.021	.015	.011	
9.0	.183	.124	.085	.158	.108	.074	.109	.076	.052	.064	.045	.031	.021	.015	.010	
10.0	.178	.120	.082	.153	.104	.072	.106	.073	.051	.062	.043	.030	.020	.014	.010	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: HF0606TB.6.3K					TYPE:					WEIGHT:				
SPEC.:					DIM.:					SERIAL No.:				
MFR.:HELIFLEX					SUR.: 0.006*1					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					25.8	27.3	26.2	27.6	28.0	26.8	28.3	27.2	28.6	29.0
3H					27.4	28.7	27.8	29.1	29.5	28.9	30.3	29.3	30.6	31.0
4H					28.0	29.2	28.4	29.6	30.0	29.9	31.2	30.4	31.6	32.0
6H					28.3	29.5	28.7	29.9	30.3	31.0	32.2	31.4	32.6	33.0
8H					28.3	29.5	28.8	29.9	30.4	31.5	32.6	31.9	33.1	33.5
12H					28.3	29.4	28.8	29.9	30.3	32.0	33.2	32.5	33.6	34.0
4H 2H					26.7	28.0	27.1	28.4	28.8	27.4	28.7	27.8	29.1	29.5
3H					28.5	29.6	29.0	30.0	30.5	29.7	30.9	30.2	31.3	31.8
4H					29.2	30.3	29.7	30.7	31.2	30.9	32.0	31.4	32.4	32.9
6H					29.8	30.7	30.3	31.2	31.7	32.1	33.1	32.7	33.5	34.1
8H					29.9	30.7	30.4	31.3	31.8	32.8	33.6	33.3	34.1	34.7
12H					29.9	30.7	30.5	31.2	31.8	33.4	34.2	34.0	34.7	35.3
8H 4H					29.8	30.7	30.4	31.2	31.7	31.3	32.1	31.8	32.6	33.2
6H					30.6	31.4	31.2	31.9	32.5	32.7	33.4	33.3	34.0	34.5
8H					31.0	31.6	31.5	32.1	32.8	33.5	34.1	34.1	34.7	35.3
12H					31.1	31.7	31.7	32.3	32.9	34.4	34.9	35.0	35.5	36.1
12H 4H					30.0	30.7	30.5	31.3	31.8	31.3	32.1	31.8	32.6	33.2
6H					30.9	31.5	31.5	32.1	32.7	32.8	33.4	33.4	34.0	34.6
8H					31.3	31.9	31.9	32.4	33.1	33.7	34.2	34.3	34.8	35.4
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.5					+ 0.2 / - 0.3				

CIE Pub.117, 319.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.6)
Area: 0.006 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	34	51	40	34	27
0.80	63	50	43	62	50	43	59	49	42	35
1.00	71	59	51	69	58	51	67	59	50	42
1.25	78	66	59	76	66	58	73	64	57	49
1.50	83	72	64	81	71	64	77	69	62	54
2.00	90	80	73	88	79	72	83	76	70	61
2.50	94	85	79	92	84	77	87	80	75	65
3.00	98	90	84	95	88	82	90	84	79	69
4.00	102	96	90	99	93	88	94	89	85	74
5.00	105	99	94	102	97	92	96	92	88	77
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators:
Test Date: 2024-11-07

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity: 65.0%
Test Distance: 6.040m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

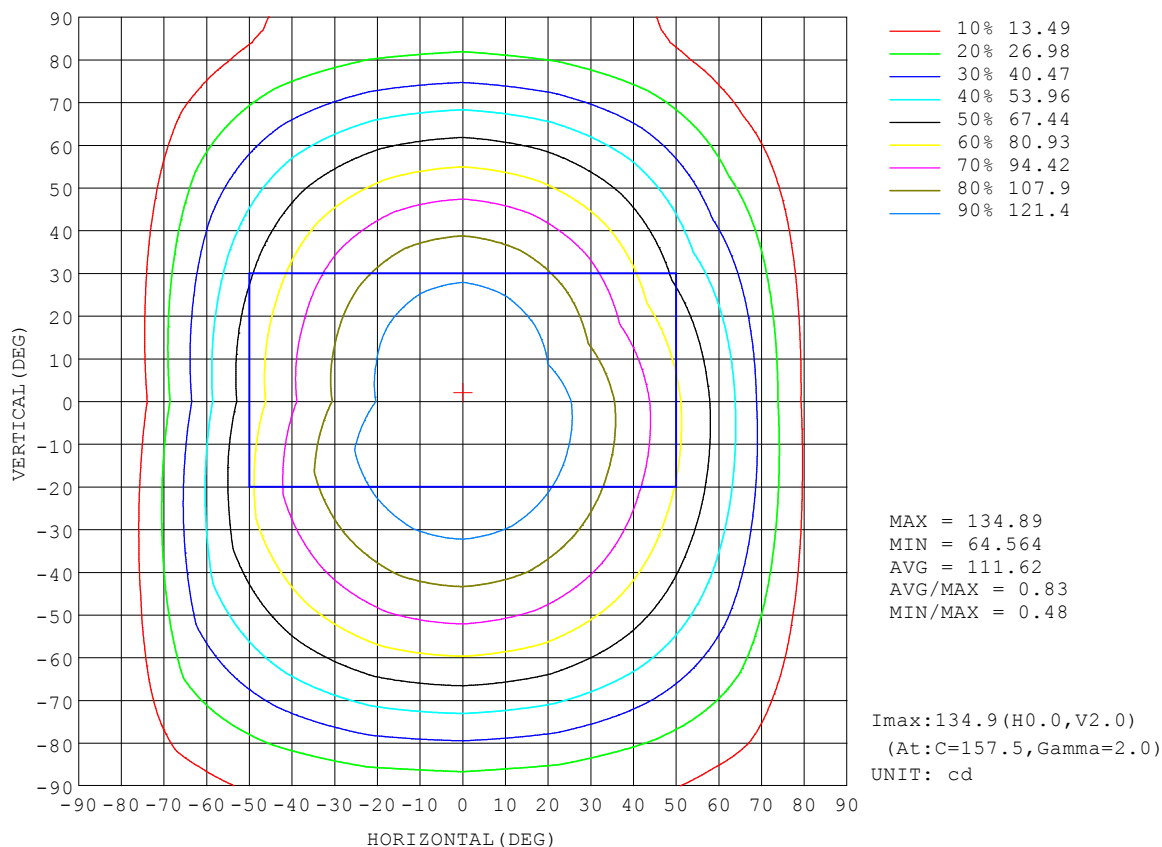


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

AAI Figure

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

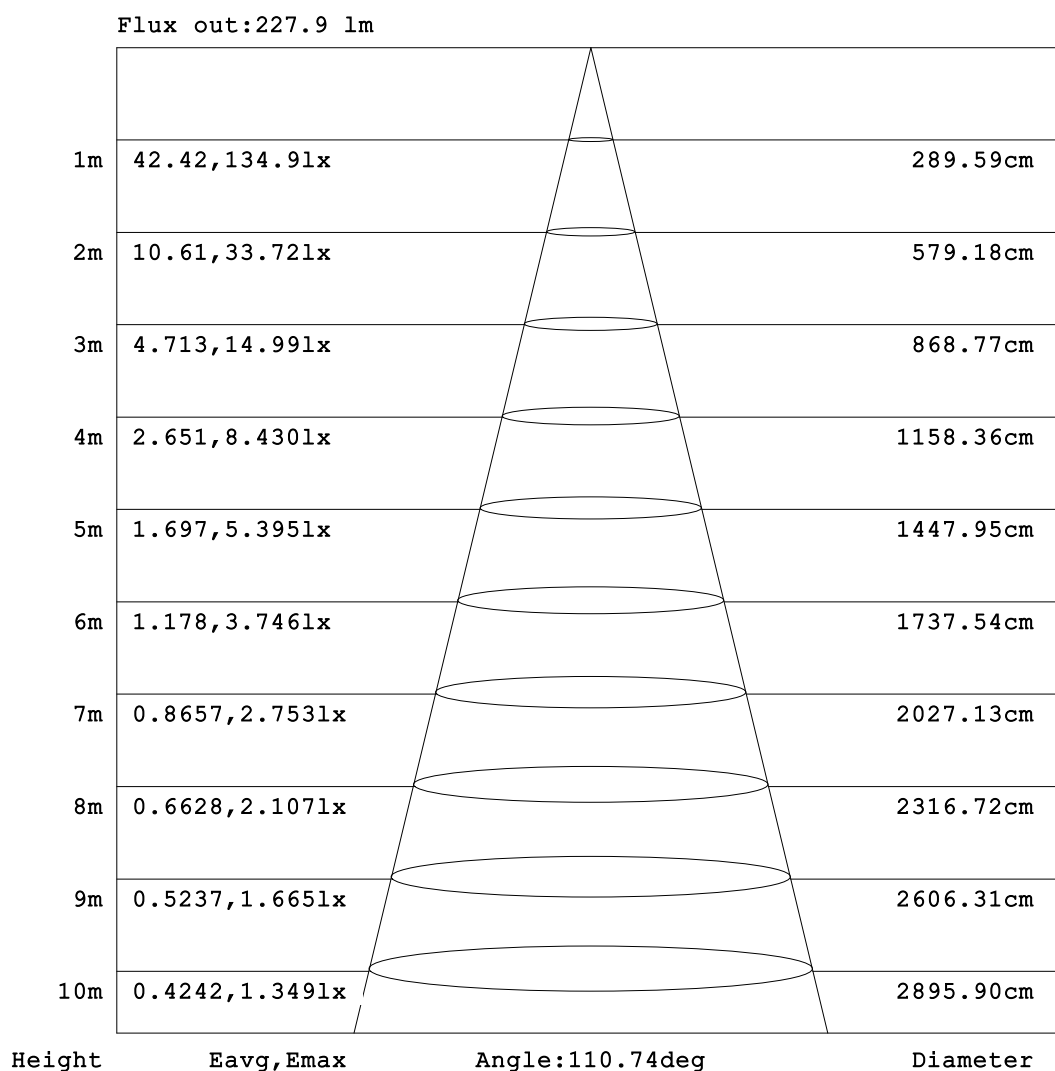


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:
 Test Date:2024-11-07

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity:65.0%
 Test Distance:6.040m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

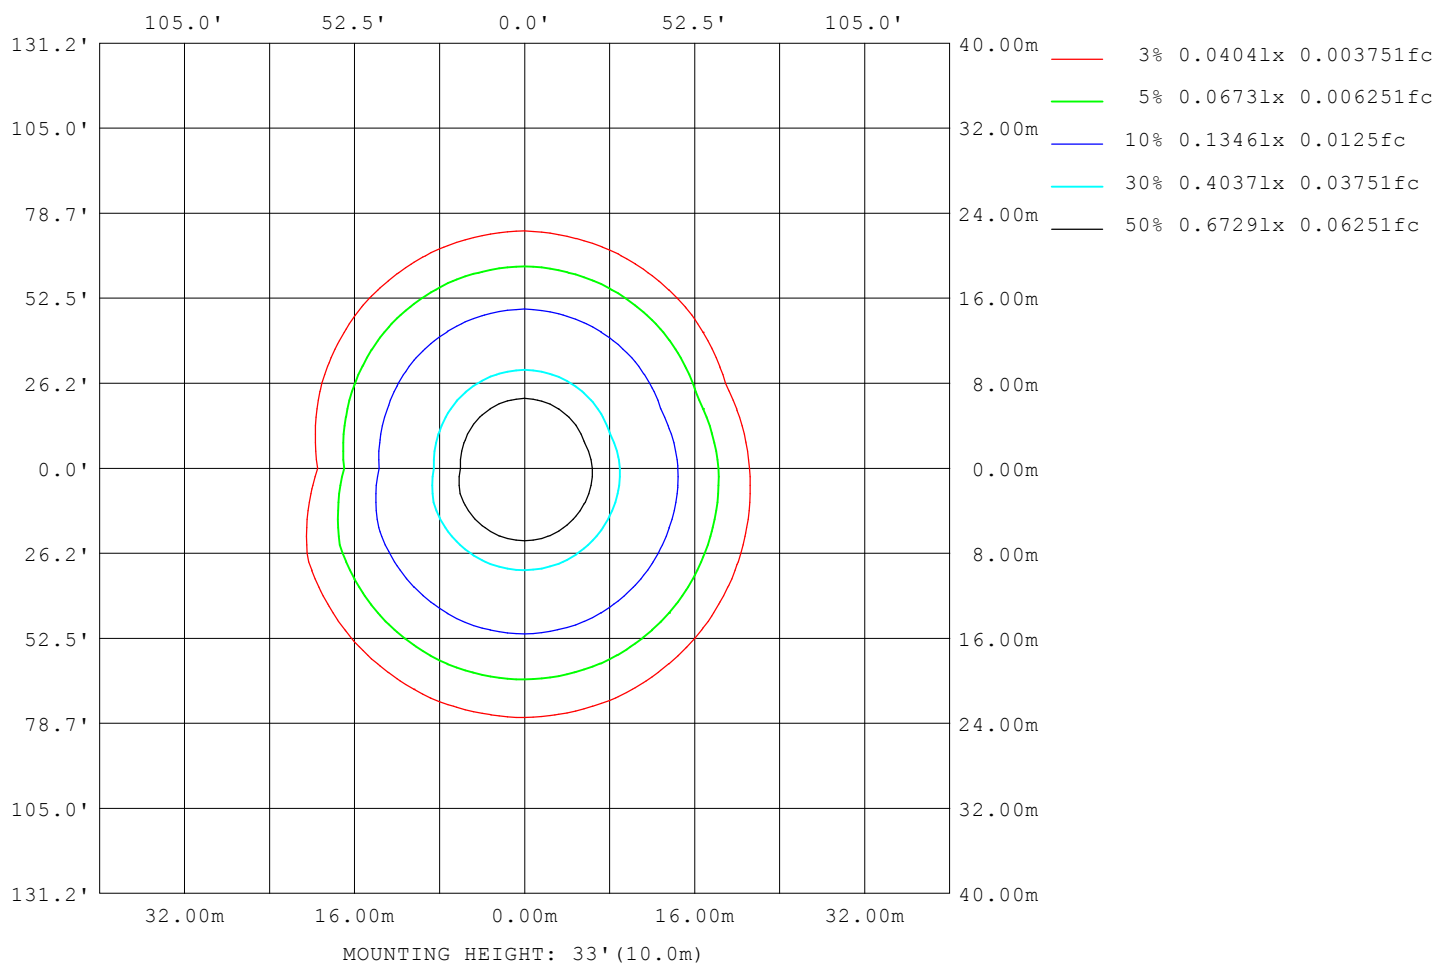

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	17199
L_0~180 (75) av	11275
L_0~180 (85) av	2095
L_90~270 (65) av	25903
L_90~270 (75) av	28841
L_90~270 (85) av	50339
L_45 (65) av	23361
L_45 (75) av	24446
L_45 (85) av	37022

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks:

Planar Illuminance Curve

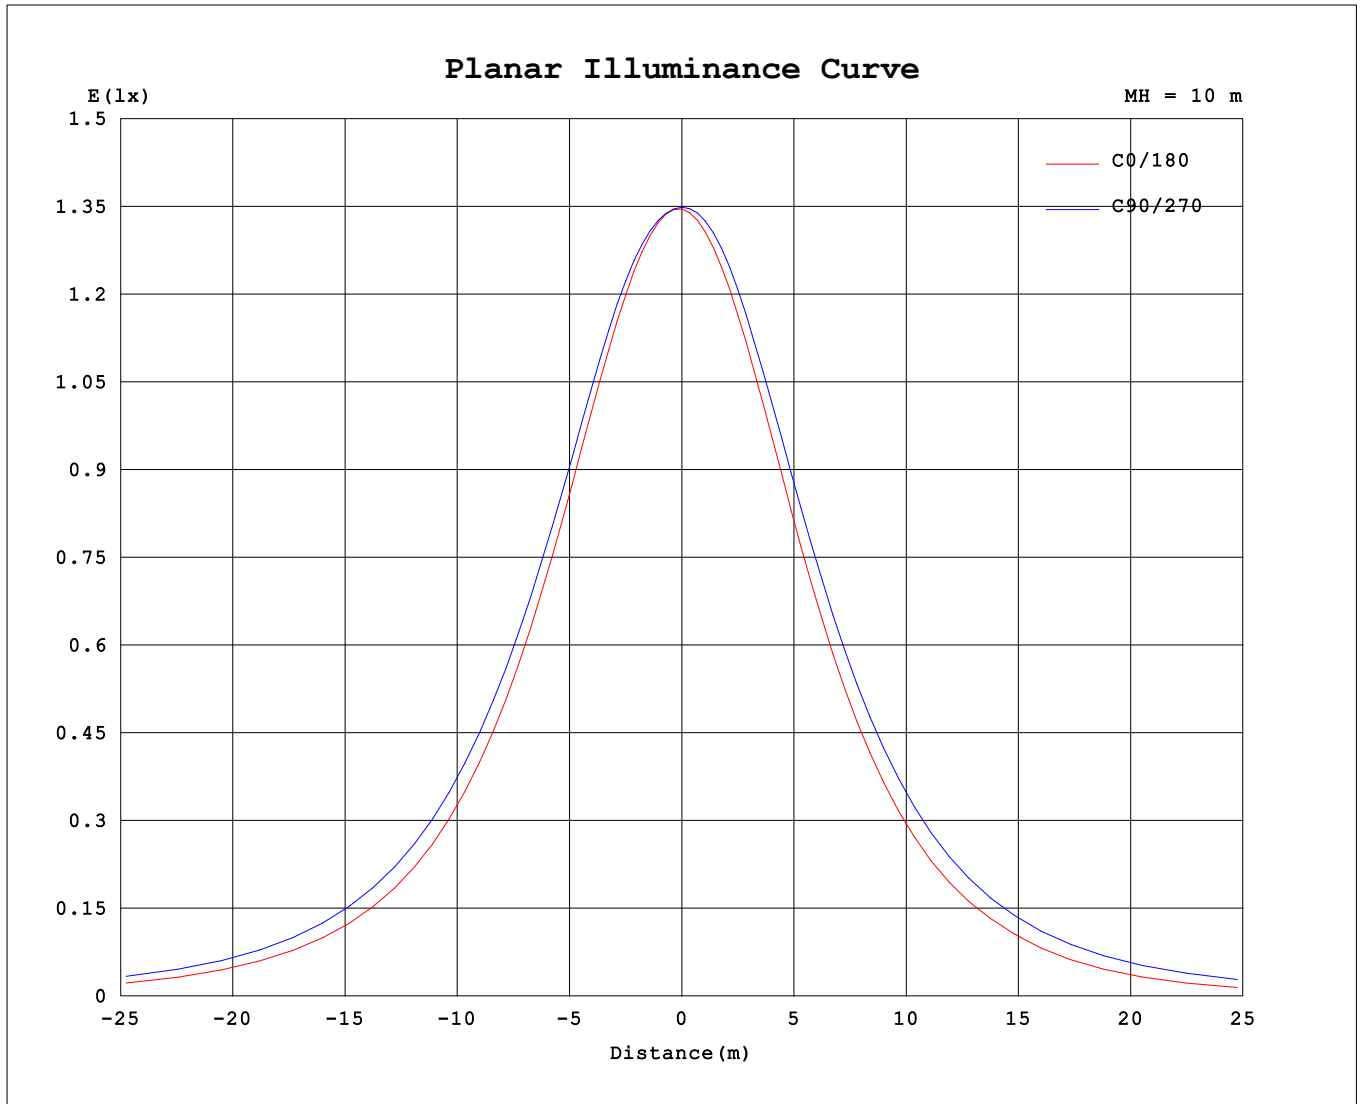

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators:
 Test Date: 2024-11-07

γ Range: 0 - 180DEG
 γ Interval: 2.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.450
 Humidity: 65.0%
 Test Distance: 6.040m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: HF0606TB.6.3K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:HELIFLEX	SUR.: 0.006*1	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135	135			
5	135	135	135	135	135	135	135	135	134	134	134	135	135	135	134	134			
10	133	134	134	134	134	134	134	134	131	131	133	133	134	133	132	131			
15	131	132	133	133	134	134	133	132	128	129	131	132	132	132	130	129			
20	127	128	130	131	131	131	130	128	122	124	126	128	128	127	126	123			
25	123	125	126	128	128	128	127	125	117	119	122	124	125	124	122	119			
30	116	118	120	123	123	123	121	119	109	112	115	118	119	118	115	111			
35	110	113	116	118	119	119	117	114	103	106	110	113	114	113	109	105			
40	101	104	108	111	112	112	109	105	92.5	96.2	101	105	106	104	100	95.2			
45	94.2	97.4	102	105	107	106	103	98.7	85.2	89.2	95.0	98.6	99.9	97.9	93.9	88.1			
50	83.1	86.8	91.9	96.2	97.8	97.1	93.4	88.3	73.5	78.0	84.5	88.4	89.8	87.6	83.2	76.8			
55	75.4	79.3	84.9	89.4	91.1	90.4	86.5	81.0	65.3	70.2	77.0	81.1	82.5	80.3	75.7	68.9			
60	63.1	67.6	73.6	78.5	80.3	79.5	75.3	69.3	50.1	57.8	65.1	69.5	70.9	68.5	63.7	56.5			
65	53.6	59.4	65.7	70.7	72.6	71.8	67.4	61.1	39.1	49.3	56.8	61.3	62.8	60.3	55.4	48.0			
70	37.3	46.7	53.2	58.4	60.4	59.5	55.0	48.4	23.3	36.1	43.9	48.6	50.2	47.7	42.5	34.9			
75	26.6	38.0	44.7	50.0	52.0	51.1	46.4	39.6	13.3	27.4	35.3	40.1	41.8	39.2	34.0	26.3			
80	11.8	25.1	31.9	37.4	39.4	38.4	33.5	26.6	1.55	15.4	23.3	28.3	30.0	27.6	22.3	14.6			
85	3.79	17.1	24.1	29.5	31.5	30.4	25.5	18.4	0.09	9.33	17.1	22.2	24.0	21.7	16.5	8.92			
90	0.09	8.29	15.4	20.7	22.7	21.3	16.2	9.02	0.09	6.37	13.7	18.7	20.5	18.6	13.6	6.47			
95	0.08	6.40	13.6	18.7	20.6	18.9	13.9	6.50	0.10	5.85	12.7	17.9	19.7	17.9	13.0	6.00			
100	0.08	5.80	12.7	17.6	19.4	17.8	12.5	5.57	0.13	4.38	11.3	16.3	18.4	16.7	11.9	4.45			
105	0.09	5.02	12.1	16.8	18.6	16.9	12.0	4.51	0.15	3.24	10.5	14.5	17.4	15.6	10.8	3.26			
110	0.12	3.14	10.7	15.5	17.1	15.5	10.1	3.19	0.17	1.50	8.18	13.1	15.2	13.4	8.50	1.40			
115	0.14	0.69	9.40	14.3	15.9	14.3	8.71	0.86	0.19	0.47	6.52	11.4	13.4	11.6	6.91	0.37			
120	0.17	0.20	6.92	11.9	13.6	11.7	6.33	0.19	0.22	0.26	4.16	8.55	10.4	8.78	4.58	0.25			
125	0.19	0.22	5.15	9.96	11.7	9.73	4.72	0.22	0.24	0.26	2.68	6.75	8.34	6.94	3.02	0.25			
130	0.22	0.25	0.57	7.07	8.52	6.83	0.31	0.24	0.26	0.26	0.84	3.97	5.33	4.26	0.67	0.25			
135	0.24	0.27	0.28	2.71	6.34	2.70	0.27	0.26	0.28	0.26	0.34	2.19	3.59	2.08	0.34	0.26			
140	0.27	0.29	0.28	0.32	0.70	0.31	0.27	0.29	0.31	0.28	0.34	0.46	0.85	0.41	0.34	0.29			
145	0.28	0.31	0.29	0.32	0.32	0.32	0.29	0.31	0.33	0.30	0.34	0.39	0.36	0.37	0.34	0.30			
150	0.31	0.33	0.31	0.34	0.32	0.34	0.31	0.33	0.35	0.32	0.35	0.38	0.36	0.36	0.35	0.33			
155	0.33	0.35	0.33	0.35	0.33	0.36	0.33	0.35	0.36	0.33	0.37	0.37	0.36	0.36	0.36	0.34			
160	0.34	0.37	0.35	0.37	0.35	0.38	0.35	0.37	0.38	0.36	0.38	0.37	0.39	0.36	0.39	0.36			
165	0.36	0.38	0.36	0.38	0.36	0.39	0.36	0.38	0.40	0.37	0.39	0.38	0.40	0.37	0.40	0.37			
170	0.38	0.40	0.38	0.40	0.38	0.40	0.38	0.40	0.40	0.38	0.40	0.39	0.40	0.39	0.40	0.39			
175	0.38	0.40	0.38	0.40	0.39	0.40	0.39	0.40	0.40	0.39	0.40	0.39	0.40	0.39	0.40	0.39			
180	0.40	0.40	0.39	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:
Test Date:2024-11-07

γ Range: 0 - 180DEG
γ Interval: 2.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.450
Humidity:65.0%
Test Distance:6.040m [K=1.0000]
Remarks: