






- Constant voltage 5M
- Top and side bending
- Salt solution resistance
- Excellent toughness
- IP67 silicone extrusion
- Max 5meter power at single end

Application Size




Dimensions

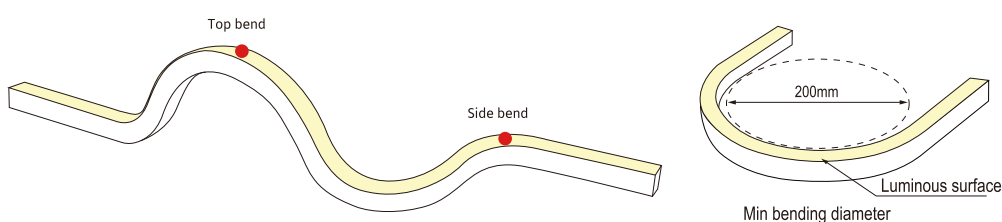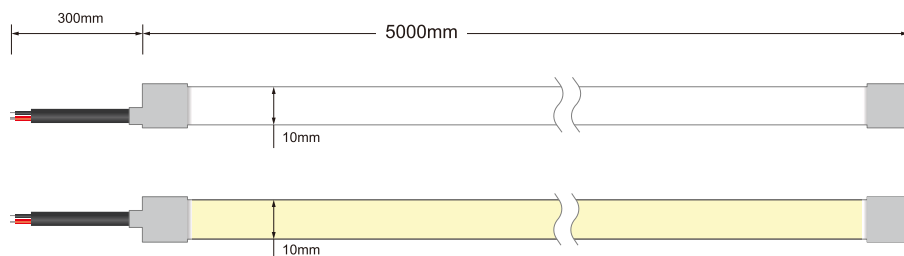

Accessories

Aluminium Mounting clips



Aluminium Profile




Product Parameters

Product code	Color	CRI	R9	Power (W/M)	Efficiency (LM/W)	Lumen (LM/M)	Voltage (V/DC)	Cut unit	IP	Max
HF1010DB.5.24K	2400K	>90	>50	5	58	290	24	35.7mm	IP67	5meter
HF1010DB.5.27K	2700K	>90	>50	5	60	300	24	35.7mm	IP67	5meter
HF1010DB.5.3K	3000K	>90	>50	5	65	325	24	35.7mm	IP67	5meter
HF1010DB.5.4K	4000K	>90	>50	5	68	340	24	35.7mm	IP67	5meter
HF1010DB.5.6K	6000K	>90	>50	5	72	360	24	35.7mm	IP67	5meter





- Constant voltage 5M
- Top and side bending
- Salt solution resistance
- Excellent toughness
- IP67 silicone extrusion
- Max 5meter power at single end

Application Size




Dimensions

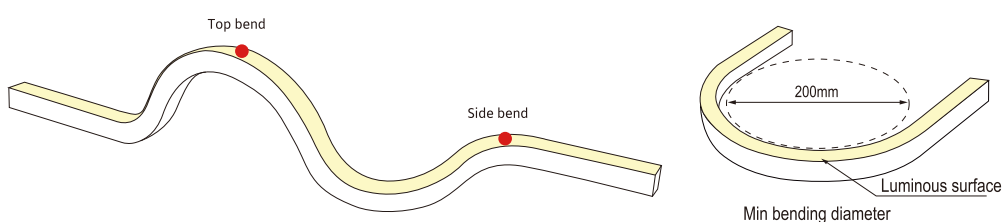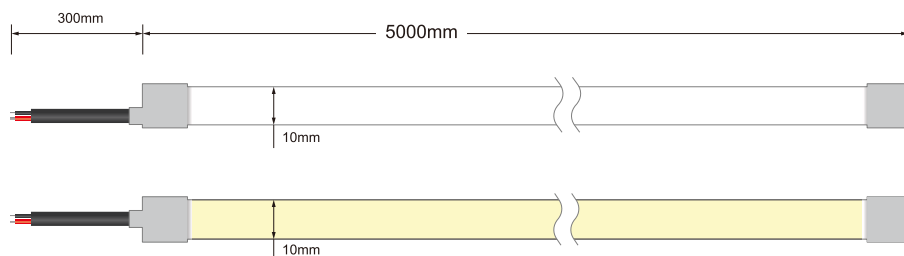

Accessories

Aluminium Mounting clips



Aluminium Profile



Product Parameters

Product code	Color	CRI	R9	Power (W/M)	Efficiency (LM/W)	Lumen (LM/M)	Voltage (V/DC)	Cut unit	IP	Max
HF1010DB.10.24K	2400K	>90	>50	10	57	570	24	35.7mm	IP67	5meter
HF1010DB.10.27K	2700K	>90	>50	10	58	580	24	35.7mm	IP67	5meter
HF1010DB.10.3K	3000K	>90	>50	10	63	630	24	35.7mm	IP67	5meter
HF1010DB.10.4K	4000K	>90	>50	10	67	670	24	35.7mm	IP67	5meter
HF1010DB.10.6K	6000K	>90	>50	10	70	700	24	35.7mm	IP67	5meter