

### 320W Single Output Switching Power Supply

## HLG-320H series



#### Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 95%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10 Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 5 years warranty (Note.10)



### 🖯 🖓 🐨 🤍 🤍 selv 1P65 1P67 🕞 c 和 us 🏝 🕰 CBC E


HLG-320H-12 A Blank : IP67 rated. Cable for I/O connection.

- A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- C : Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.


#### SPECIFICATION

MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320 H-54			
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V			
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15~30V	18~36V	21~42V	24 ~ 48V	27~54V			
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A			
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W			
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p			
	VOLTAGE ADJ. RANGE Note.6			17~22V	21 ~ 26V	26~32V	32~39V	38 ~ 45V	43 ~ 52V	49 ~ 58V			
OUTPUT					Atype and C type				10 021	10 001			
	CURRENT ADJ. RANGE	11 ~ 22A 9.5 ~ 19A 7.5 ~ 15A 6.67 ~ 13.34A 5.35 ~ 10.7A 4.45 ~ 8.9A 3.8 ~ 7.65A 3.35 ~ 6.7A 2.97 ~ 5.95											
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
		2500ms, 80m		230VAC /115 V		_0.0 %	0.070		_0.070				
	HOLD UP TIME (Typ.)		ad 230VAC/										
		90 ~ 305VAC	127 ~ 431										
	FREQUENCY RANGE	47~63Hz	12/ 40										
PROTECTION	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%			
INPUT	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%			
PROTECTION	AC CURRENT (Typ.)	3.5A / 115VA			1.45A / 277VAC		30 /0	50 /0	5570	00 /0			
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010µs measured at 50% lpeak) at 230VAC											
	LEAKAGE CURRENT												
	LEARAGECORRENT	<0.75mA/ 277VAC											
PROTECTION	OVER CURRENT Note.4	95 ~ 108% Protection type : Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	HICCUP mode, 14 ~ 17V			fault condition	33 ~ 37V	40~46V	46.5~53V	52 E 601/	59 ~65V			
	OVER VOLTAGE		17.5 ~ 21V	22.5 ~ 27V	27 ~ 33V			40.5~55V	53.5~60V	59~050			
		Protection type : Shut down and latch off o/p voltage, re-power on to re cover											
	OVER TEMPERATURE	100°C ±10°C (RTH2)											
		Protection type : Shut down and latch off o/p voltage, re-power on to recover											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20~95% RH non-condensing											
ENVIRONMENT	STORAGETEMP., HUMIDITY	-40 ~ +80°C ,											
	TEMP. COEFFICIENT	±0.03%/°C (0											
	VIBRATION				72min.each alo								
	SAFETY STANDARDS Note.7			0.0-08, EN6134	7-1, EN61347-	2-13 independ	ent (except for	HLG-320H C t	ype),IP65 or IP	67, J61347-1,			
		J61347-2-13											
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC											
EMC	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500 VDC / 25°C / 70% RH Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧50% load) ; EN61000-3-3										
	EMCEMISSION			,	, ,		·	,,					
	EMCIMMUNITY				EN61547, EN5	5024, light indu	ustry level (sur	ge 4KV), criter	ia B				
	MTBF			3K-217F (25℃	)								
OTHERS	DIMENSION	252*90*43.8n	. ,										
	PACKING		16Kg/0.92CUF										
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>Constant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please reconfirm special electrical requirements for some specific system design.</li> <li>Derating may be needed under low input voltages. Please check the static characteristics for more details.</li> <li>A type and C type only.</li> <li>Safety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18.</li> <li>Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.</li> <li>The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by th complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</li> </ol>												




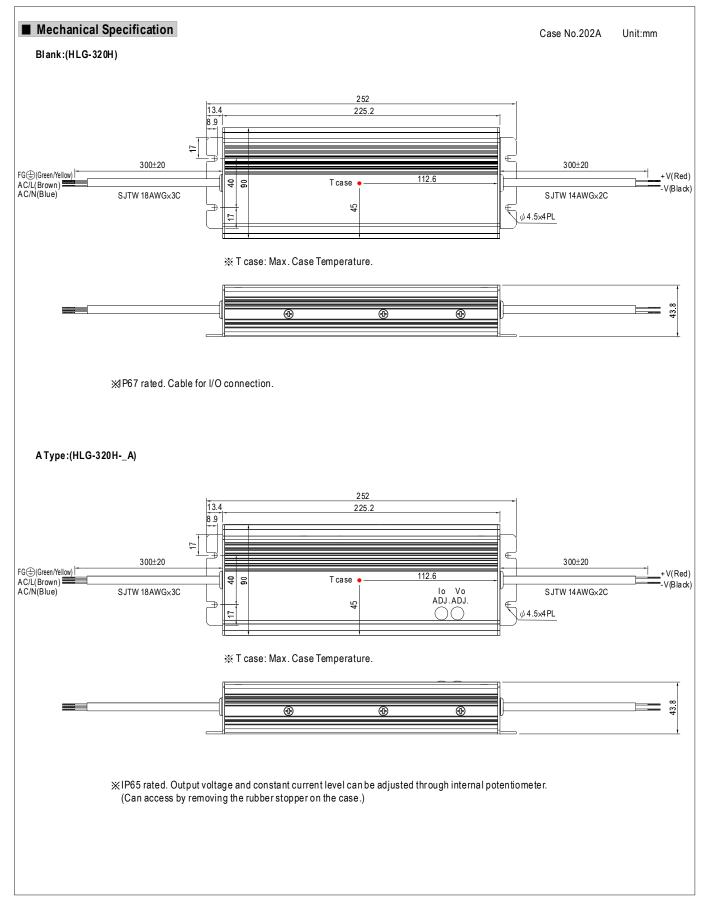



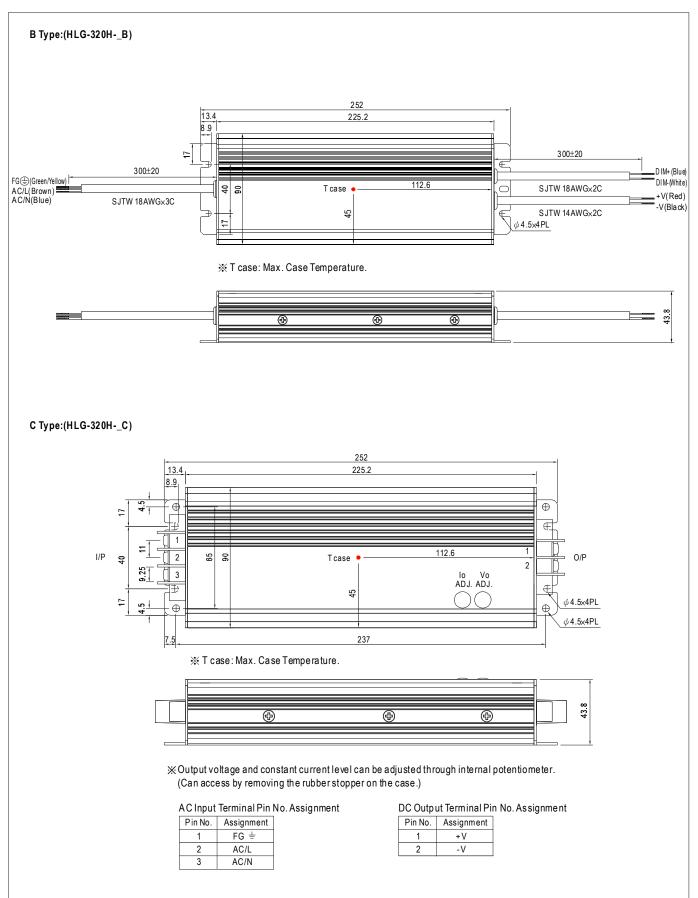




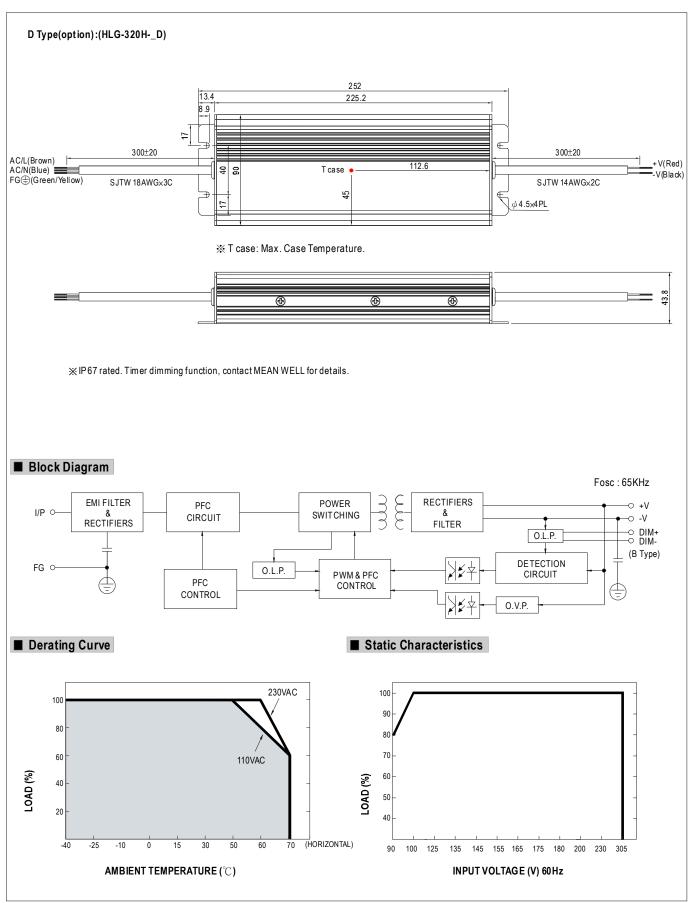




### 320W Single Output Switching Power Supply

## HLG-320H series

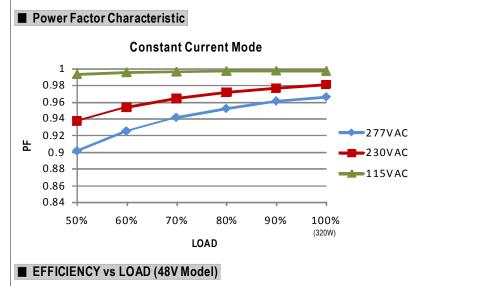


HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

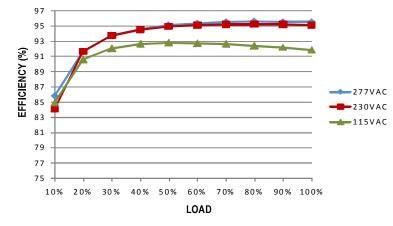

### ■ DRIVING METHODS OF LED MODULE


There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

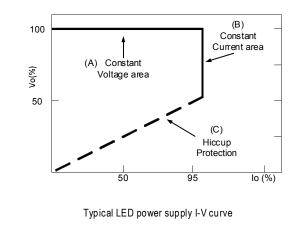



€)(Green/Yellow) L(Brown) ━━━━━ N(Blue)													
				HLG-320H									
1 ∼ 10 Vd ※ Please D	in 1 dimming functi c or 10V PWM signa O NOT connect "DI e resistance value f	al betwee M-" to "-V	n DIM+a '".	ind DIM			can be a	djusted th	nrough ou	it put cab	leby conr	necting a resis	tance or
<b>D</b> : /	Single driver	<b>10Κ</b> Ω	<b>20Κ</b> Ω	<b>30Κ</b> Ω	<b>40Κ</b> Ω	<b>50Κ</b> Ω	<b>60Κ</b> Ω	<b>70Κ</b> Ω	<b>80K</b> Ω	<b>90Κ</b> Ω	<b>100K</b> Ω	OPEN	
Resistance value	Multiple drivers (N=driver guantity for synchronized dimming operation)	10KΩ <i>I</i> N	20K ∩/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100KΩ/N		
Percentag	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%	
×1~10V d	imming function for	outputc	urrentad	justment	(Typical)								
Dimming v	alue	1V	2V	3V	4 V	5V	6V	7V	8V	9V	10V	OPEN	
Percentag	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%	
	Isignal for output c	ur rent ad	iustment	(Typical)	: Freque	ncy range	e:100HZ	~ 3KHz					
Duty value		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN	
Percentag	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%	
achieve ( ※Direct co	built-in dimming fu 0% brightness of the nnecting to LEDs is nnection diagram fo i L	e lighting suggeste	fixture co ed, but is	onnecting not suital	to the LE ble for us	ED power ing additi	supply u	nit.	. Please	refertott	ne connec	stion method b	below to

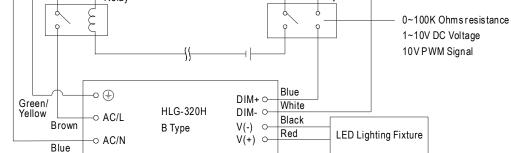

Using a switch and relay can turn  $\ensuremath{\mathsf{ON/OFF}}$  the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10V dc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



### ■ WATERPROOF CONNECTION

### $\odot$ Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-320H to operate in dry/wet/damp or outdoor environment.

